
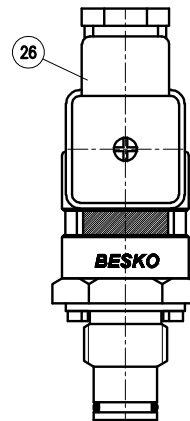
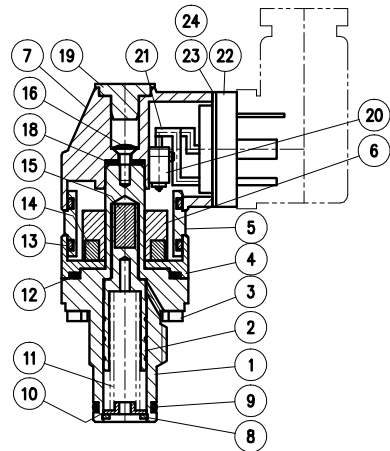


### SPECIFICATION

1. 사용유 : ISO VG 46상당
2. 사용유온 :  $-10^{\circ}\text{C} - 80^{\circ}\text{C}$  ( $-20^{\circ}\text{C} - 90^{\circ}\text{C}$  / 5분간이내 )
3. 최고사용압력 :  $280 \text{ Kg/cm}^2$
4. 전압사양 : 250 VAC

### SYMBOL



26	DIN CONNECTOR			1	CI8311N21(mpm)
25	NOTICE PLATE	8841920		1	
24	동근적은나사			4	M3x7L
23	GASKET			1	(mPm)
22	BASE			1	B143000N2(mPm)
21	CABLE			3	AWG12
20	MICRO SWITCH			1	J-7(OMRON)
19	CAP	8841950		1	
18	O-RING			1	AP7
17	NOTICE PLATE	8841884		1	
16	동근접시나사			1	M3x8L
15	MAGNETIC			1	$\phi 5 \times 11t$
14	MAGNETIC			1	$\phi 20 \times \phi 13 \times 5t$
13	O-RING			2	S26
12	O-RING			1	S25
11	SPRING	8841887		1	
10	S/P RETAINER	8841886		1	
9	O-RING			1	AS568-014(Hs70)
8	C형 멈춤링			1	$\phi 11$ 구멍용
7	HOUSING	8830882		1	
6	MAGNETIC GUIDE	8841880		1	
5	PIPE	8841952		1	
4	PLATE	8841879		1	
3	BOLT PACKING			1	PF1/2용
2	PLUNGER	8841885		1	
1	CARTRIDGE	8830855		1	
NO	DESCRIPTION	MATERIAL	DRAW.NO	Q'TY	REMARK

### 형식기호설명

DVE - 05

BY PASS 압력 :  $5 \text{ kg/cm}^2$

기본형식 : VISUAL ELECTRICAL INDICATOR

		SCALE 1/1.2 DATE 2008.7	
DIM mm			
PLANT STANDARD FACILITY PRESSURE FILTER		REFERENCE DWG. NO.	
TITLE VISUAL ELECTRICAL INDICATE ASS'Y		DRAWING NO. 8830883	
SIGN DESIGNED CHECKED REVIEWED APPROVED		DISKETTE NO.	
NO. DATE REVISIONS Q'TY CHARGE APPROVED DATE		REV	