

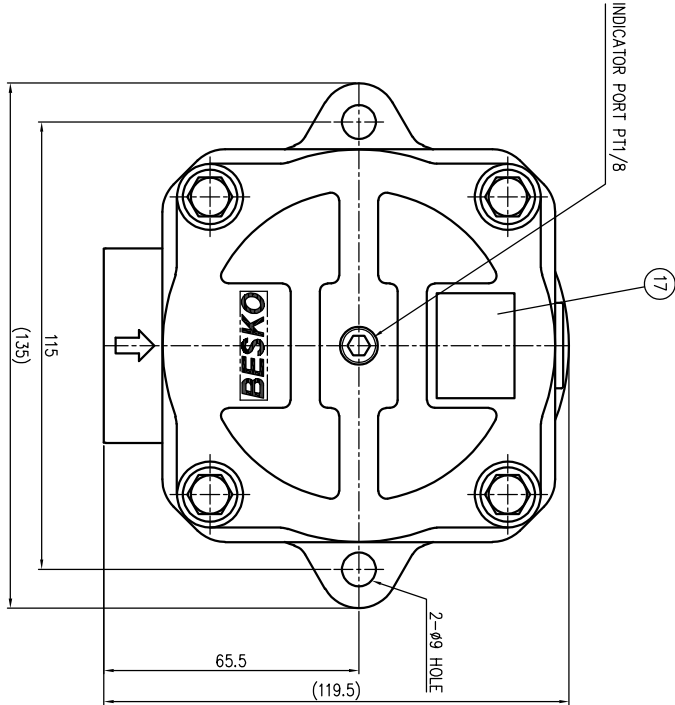
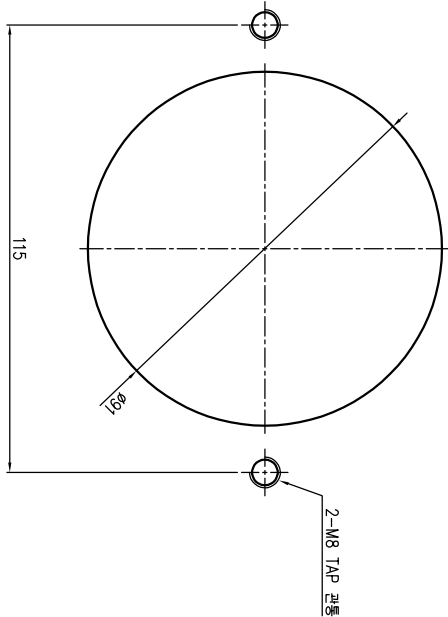





## SPECIFICATION

APPLICATION	SPEC'		
	L/MIN	A TYPE	B TYPE
MAX FLOW RATE		40	95
MAX PRESSURE	kgf/cm <sup>2</sup>	10	
WORKING TEMPERATURE	°C	-10~100°C	
FILTER ELEMENT	μ m		
BY PASS V/V SETTING	kgf/cm <sup>2</sup>	1.5	

## 영신 기호 설명

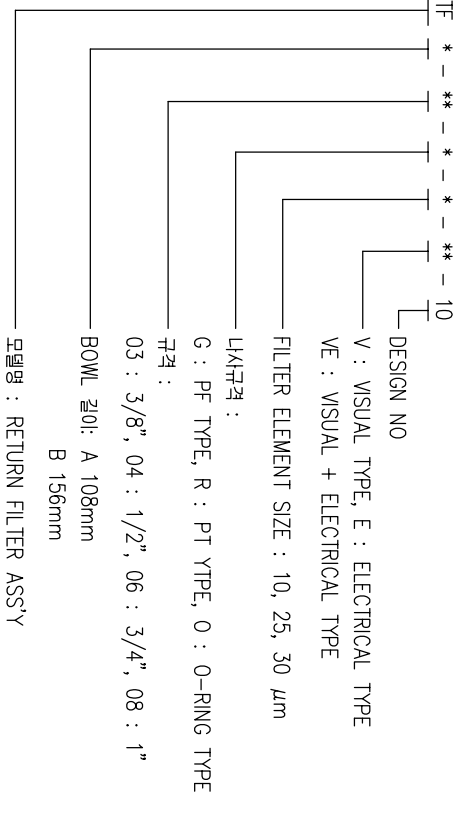

## TANK 가공 치수

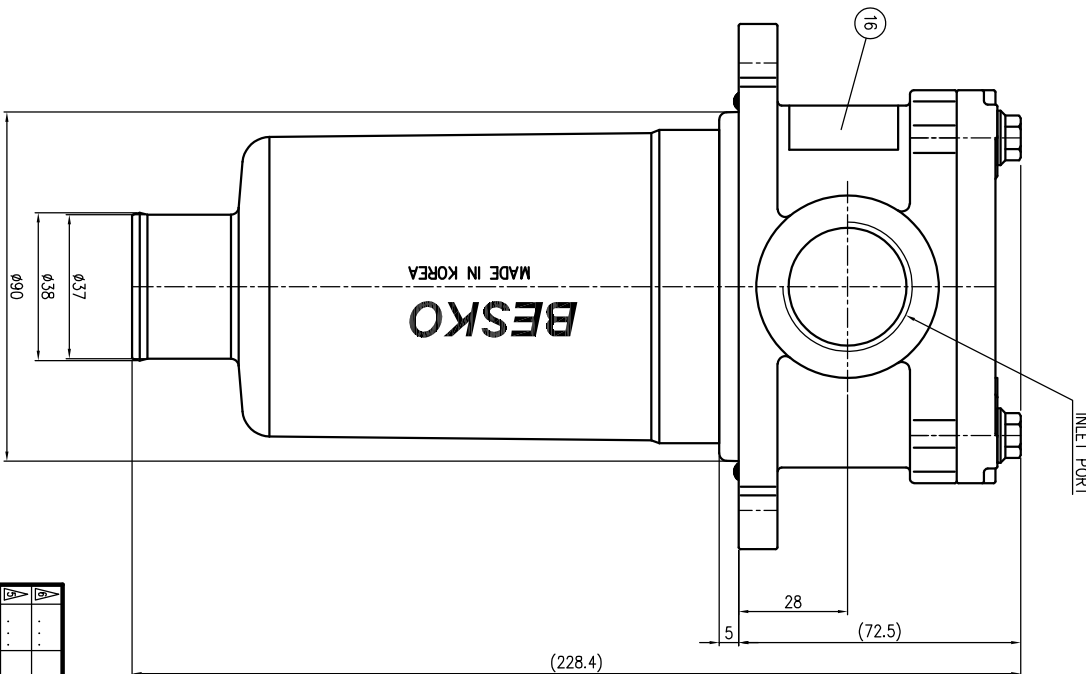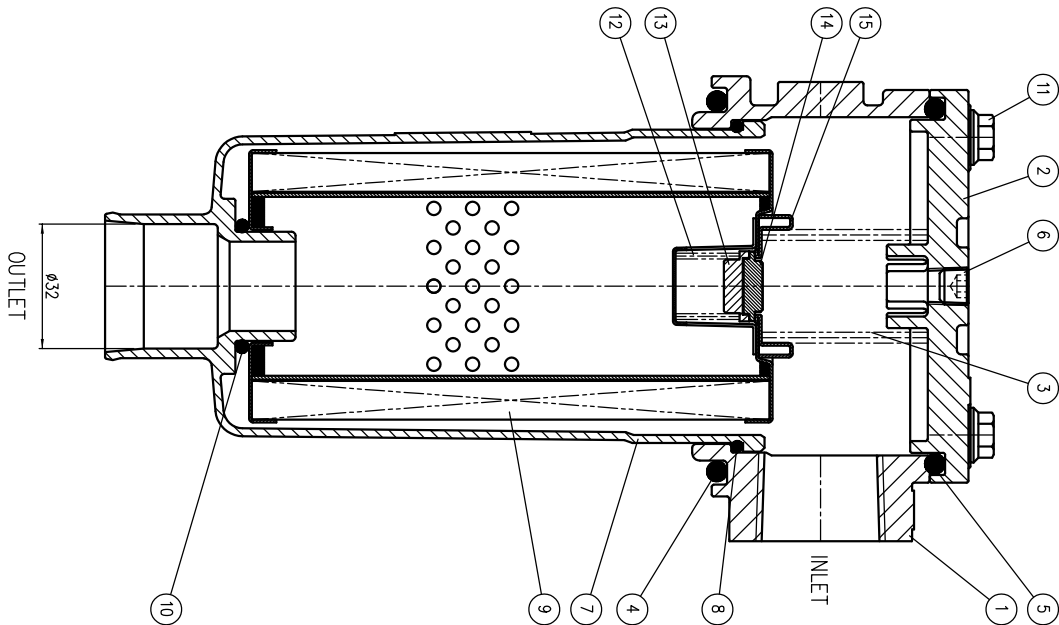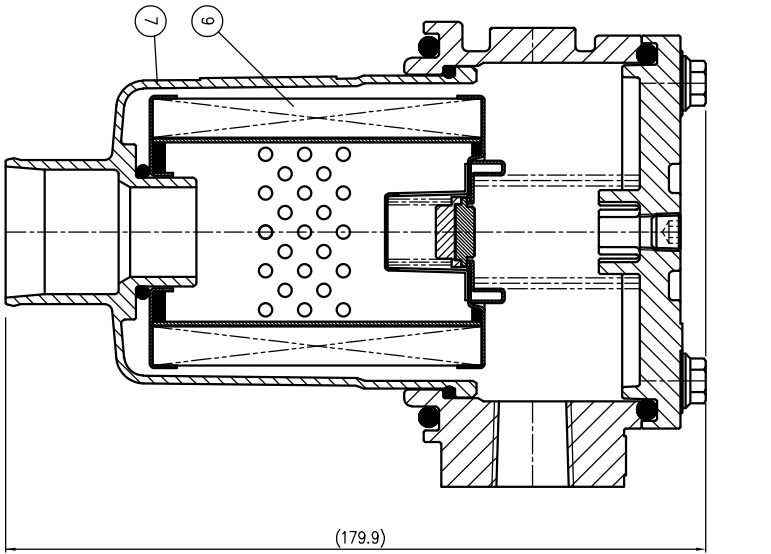

17	NAME PLATE		8844320	1	
16	NOTICE PLATE		8844309	1	
15	SPRING RETAINER		8844313	1	
14	PACKING		8844312	1	
13	PACKING RETAINER		8844311	1	
12	BYPASS SPRING		8844310	1	
11	FLANGE BOLT			4	M6×20L 01연도금
10	O-RING	NBR		1	AS568-215A
9	FILTER ELEMENT B		8832157	1	
	FILTER ELEMENT A		8832158	1	
8	O-RING	NBR		1	G80A
7	BOWL B		8832155	1	
	BOWL A		8832156	1	
6	TAPER PLUG			1	PT1/8
5	O-RING	NBR		1	AS568-340A
4	O-RING	NBR		1	AS568-341A
3	SPRING		8844261	1	
2	COVER		8821005	1	
1	HOUSING		8811604	1	
NO	DESCRIPTION	MATERIAL	DRAW.NO	Q'TY	REMARK